

SENCO[®]MAKING HARD WORK
EASIER

FinishPro25XP

Brad nailer



Applications

Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe, molding, cabinets, drawers and picture frame assembly


Features & Benefits

- Comfort and convenient features include: overmold comfort grip, overmold trigger, "on-tool" power adjustment, 360° adjustable exhaust, and belt hook
- Lightweight at 1,2kg for easy maneuvering and all day work
- Drives slight and medium head 1,2mm brads (AX and AY) from 15mm to 55mm
- On-tool power adjustment to lengthen the life of the tool when used primarily with shorter fasteners
- Wrenches onboard to make the adjustment fast and easy
- NeverLube[®] technology – no lubrication required

Technical specifications

Dimension (LxWxH)	249x56x251 mm
Net weight	1,2 kg
Firing mode	Restrictive
Air inlet	1/4" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	52,7 l/m
Operating temperature range	-18 - 49 °C
Shots / second	5
Magazine capacity	110 pieces
Gauge	18 ga.
Collation type 1	Glue collated
Collation type 2	Glue collated
Collation angle	0 °

Fastener specification

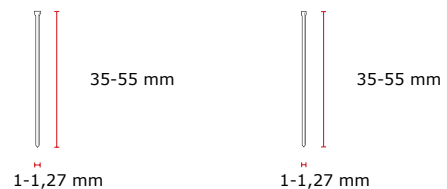

Description

FinishPro25XP, brad nailer 1,2mm (AX/AY)

Art. Nr.

762002N

EAN code

0741474304033