

SENCO[®]MAKING HARD WORK
EASIER

FramePro601

Clipped head framing nailer



Applications

Framing, sheathing, truss building, sub-flooring and decks. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.


Features & Benefits

- Selectable trigger actuation
- Sawtooth safety that digs in for precision toenailing
- Shorter, straight-line 34° magazine for better line of sight and superior maneuverability
- Reliable internal design with full round driver
- Tool-free adjustable exhaust
- Well-balance and powerful
- Tool-free adjustable depth-of-drive control
- Soft comfort grip handle reduces fatigue

Technical specifications

Dimension (LxWxH)	384x106x337 mm
Net weight	3,62 kg
Firing mode	Dual
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	283,2 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	96 dB
Sound power level (Lwa)	101 dB
Vibration level	3,7 m/s ²
Magazine capacity	70 pieces
Collation type 1	Paper collated
Collation angle	34 °

Fastener specification

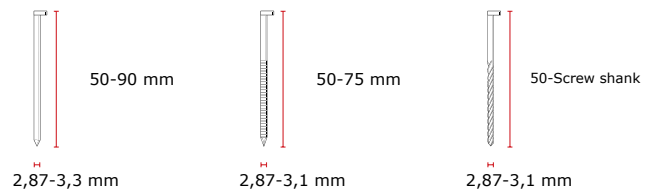

Description

FramePro601, CH framing nailer

Art. Nr.

1G2101N

EAN code

0741474124631