

Clipped head framing nailer



Applications

Truss building, framing, sub-flooring, sheathing and decks. Other applications include crate and box assembly, pallet making and fencing. Great for any application where cordless convenience would be a benefit.


Features & Benefits

- Cordless convenience - no hoses, no compressors, no hassles. Navigate the job site with no restrictions
- Powerful motor - high-voltage ignition gives you more power and cleaner combustion
- Consistent drives In all Weather conditions – performs optimally between -7° to 49°C
- Durable metal magazine – rugged design outlasts plastic
- Tool-free, metal thumbwheel depth-of-drive – easily control fastener depth with no tool required

Technical specifications

Dimension (LxWxH)	371,5x107x375,5 mm
Net weight	3,58 kg
Firing mode	Restrictive
Sound pressure level (Lpa)	87 dB
Sound power level (Lwa)	97 dB
Vibration level	3,1 m/s ²
Fastener driving power	79 J
Magazine capacity	70 pieces
Collation type 1	Paper collated
Collation angle	34 °
Battery type	Ni-Mh
Battery voltage	6 V
Battery ampere rating	1,65 Ah
Battery power	9,9 W
Recharge time 100%	120 minutes
Shots per charge	3300
Number of batteries in kit	2 pieces
Length fuel cell	165 mm
Fuel cell type	40 gram
Shots per fuel cell	1400
Voltage (ac)	230 V
Frequency	50 Hz
Electrical plug type	UK

Fastener specification

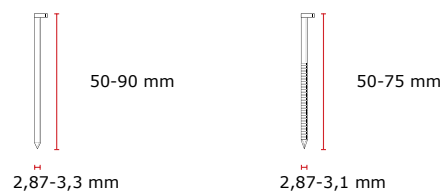

Description

GT90CH, CH framing nailer

Art. Nr.

5F7001N

EAN code

0741474062360