TENSIONERS • STEEL

Push Design Flat Load Applications

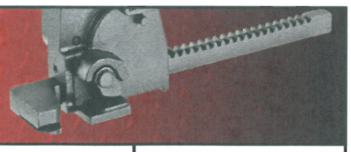

Model (Part Number)	Strap Size				Strap Type	Tool Type	Weight	
	Width		Thickness					
	inch	mm	inch	mm			lbs	kg
MIP-1800	3/8 to 3/4	9.5 to 19.0	0.015-0.023	0.38-0.58	Regular & High Tens	Medium Tension	4	1.8
MIP-1860	5/8 to 1-1/4	16.0 to 32.0	0.023-0.031	0.58-0.78		High Tension	7	3.2

MIP-1800
3" Handle

MIP-1860
7.25" Handle

ORDER
800-800-5104
DIRECT

SEALERS • STEEL

Notch Design Single & Double

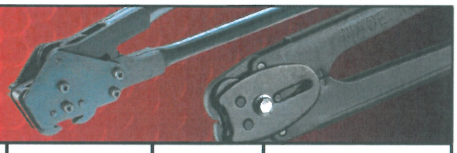

Model (Part Number)	Strap Size				Sealer Type	Seal Type	Seal Number	Tool Type	Weight	
	Width		Thickness							
	inch	mm	inch	mm					lbs	kg
MIP-1100-12	1/2	12.7	0.015-0.023	0.38-0.58	Double Notch	Snap On	S12S02	Regular Duty	3	1.4
MIP-1100-58	5/8	16					S58S02			
MIP-1100-34	3/4	19					S34S02			
MIP-1120-12	1/2	12.7			Single Notch	Push Type	S12P02			
MIP-1120-58	5/8	16					S58P02			
MIP-1120-34	3/4	19					S34P02			
MIP-1152-12	1/2	12.7	0.025-0.031	0.64-0.79	Double Notch	Snap On	S12S02	Heavy Duty	5	1.8
MIP-1152-58	5/8	16					S58S02			
MIP-1152-34	3/4	19					S34S02			
MIP-3000-34	3/4	19			Single Notch	Push Type	S34P03		11.0	5.0
MIP-3000-114	1-1/4	32					S114P03			
MIP-3100-34	3/4	19			Double Notch	Snap On	S34S03			
MIP-3100-114	1-1/4	32					S114S03			

MIP-1100
14" Handle

BEST SELLER

MIP-1152
17.5" Handle

MIP-3000
25.5" Handle
Side Action

MIP-1120
14" Handle

MIP-3100
25.5" Handle
Side Action

ORDER
800-800-5104
DIRECT

TOOL TIP
Side action sealer's lower handle can be rested on the flat surface of the product being strapped. Operator's can apply much of their weight with both hands on the upper handle.