

SENCO[®]MAKING HARD WORK
EASIER**SCN49XP**

Coilnailer



Applications

Siding, exterior decks, decking, exterior trim, fencing, subflooring, wood shingles, crate and box assembly and floor sheathing.


Features & Benefits

- Well balanced and lightweight – only 2,72kg.
- Selectable trigger – quickly select mode of operation
- Dual collation – Allows the choice between wire or plastic collation
- Adjustable depth of drive – For consistent and controllable drive
- Huge fastener range – tackles many applications

Technical specifications

Dimension (LxWxH)	314x132x304 mm
Net weight	2,31 kg
Firing mode	Selectable
Air inlet	3/8" female NPT
Operating pressure	5 - 8,3 bar
Air consumption (at 60 shots per minute)	111 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	86 dB
Sound power level (Lwa)	96 dB
Vibration level	3,09 m/s ²
Shots / second	3
Magazine capacity	375 pieces
Collation type 1	Wire collated
Collation type 2	Plastic collated 16mm
Collation angle	15 °

Fastener specification

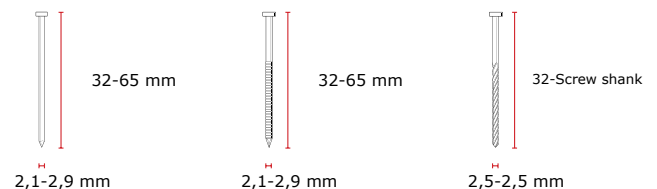

Description

SCN49XP, coilnailer, dual

Art. Nr.

5J2001N

EAN code

0741474111365