


Combination Tools

For steel strapping

Pneumatic push-type


Pneumatic push-type combination tools, including the PNSC and PRH-Series models, are used with push-type seals on irregular-shaped packages. Air power tensions, seals and cuts the strapping.

Model	Part Number	Strap Size				Strap Type	Seal Name	Joint Type	Weight	
		Width		Thickness					lbs	kg
		inch	mm	inch	mm					
Pneumatic push-type										
PNSC 2-12	422495	1/2	12.7	0.017-0.023	0.43-0.58	Apex Plus, Magnus	12 SPC	Single	9.5	4.3
PNSC 2-58	422496	5/8	15.9	0.017-0.023	0.43-0.58		58 SPC	Reverse		
PNSC 2-34	422497	3/4	19.0	0.017-0.025	0.43-0.64		34 PNSC	Notch		
PRHM-34	306700	3/4	19.0	0.025-0.031	0.64-0.79	Magnus	34 HOC	Double	16	7.3
PRHR-34	424234	3/4	19.0	0.025-0.031	0.64-0.79	Magnus	34 HOC	Reverse	34	15.4
PRHR-114	423570	1-1/4	31.8	0.025-0.035	0.64-0.89		114 P	Notch	34	15.4

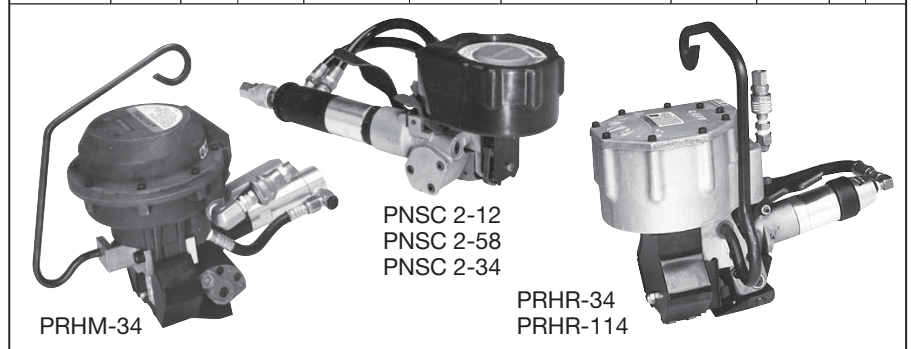

Coil Lifter

Capable of lifting up to 125 lb. strap coils, the standard coil lifter is designed for easy dispenser loading, both vertically and horizontally. Available in a stationary or portable model.

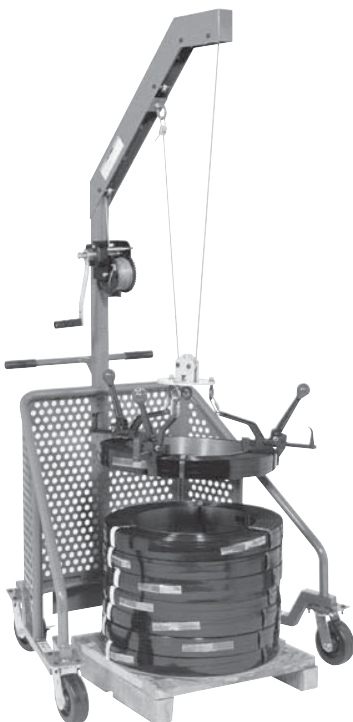

Pneumatic tool accessories **

All new Signode pneumatic tools are supplied with a quick-disconnect plug. A filter-regulator-lubricator is needed with all pneumatic tools. These additional fittings and air hoses are available from Signode to provide efficient installation.

Recommended air hose for pneumatic tools: 10' x 1/2" (3.0m x 12mm) i.d. (Part No. 424774)

Note: Use light hydraulic oil in lubricator, such as Non-Fluid Oil No. LS-1236 (Part No. 008556) or equivalent.

** See Page 21 for additional information on the pneumatic tool accessories.

Recommended Air Line Piping

